

# DL-A-ALHB

## SERIES

### Linear Utility Lighting

A smart linear LED light with adjustable brightness and color settings to fit almost any application.

Use DL-A-ALHB series LED lighting fixtures as a building block to create the perfect lighting environment. Each fixture is self-contained and easy to install with adjustable brightness levels and color temperature, and compatible with various plug-and-play sensors.

### Product Features

- Save Time and Money on Nonstandard Installations
- Easy Installation
- Adjustable Brightness and Color Temperature (on models ending with A)
- Available Plug-And-Play Sensors

### BENEFITS OF LED BAY LIGHTING

- Instant On - No Warm-Up Period
- Reduced Energy Consumption
- Maintenance Free
- Long Life Expectancy
- Durability
- Superior Light Quality
- High Efficiency

# LM-UTS-B5

## SERIES

Linear Utility  
Lighting



### Product Specifications



**Electrical:**

Input Voltage: 110 to 277 VAC  
Input Frequency: 60 Hertz



**Photometric:**

Lumen Range: 9,700 to 33,600  
Wattage Range: 100 to 240 Watts  
Color Temperature (CCT): 3,000 to 5,000K



**Rated Life:**

50,000 hours



**Mounting:**

Surface or Suspended



**Housing:**

Heavy duty aluminum



**Certifications:**

ETL, cETL



**Limited Warranty:**

5-Year


### Available Models

MODEL #	TYP. MOUNTING HEIGHTS	LUMENS	WATTS	LUMENS /WATT	CRI	BEAM ANGLE	WEIGHT	LENGTH	HEIGHT
DL-A-ALHB 100	12' to 34'	14,500	100	145	70	120°	10 lbs.	11.8"	2.4"
DL-A-ALHB 150A	14' to 34'	9,700-21,000	65-150	140-150	70	120°	11 lbs.	23.6"	2.4"
DL-A-ALHB 200	16' to 34'	28,000	200	140	70	120°	11 lbs.	23.6"	2.4"
DL-A-ALHB 240A	18' to 34'	18,000-33,600	120-240	140-150	70	120°	12 lbs.	29.5"	2.4"

This Lumerica LED lighting fixture must be installed correctly. The contractor, owner, installer, purchaser, and user is responsible for installing, maintaining, and operating the light fixture in compliance with all state and local laws, ordinances, regulations, and the American National Standards Institute (ANSI) Safety Code.

The validity of the product warranty is subject to the correct storage, installation, operation, and maintenance of this product. Failing to comply with proper storage, installation, operation, and maintenance routines will make the warranty invalid. Specifications subject to change without notice.

### Dimensions

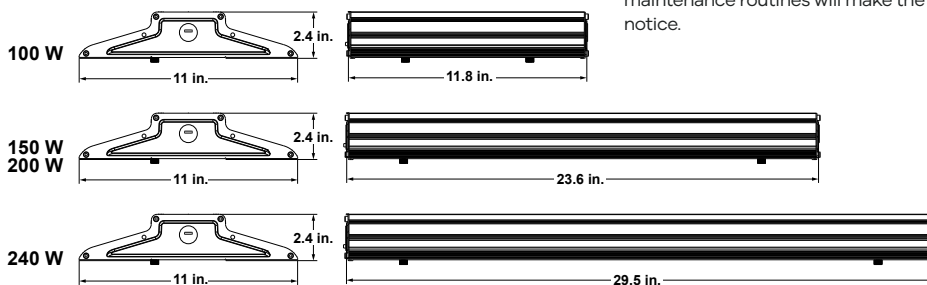

**LUMERICA**  
— BE BOLD. BE BRIGHT. —

21400 Hoover Road, Warren, Michigan 48089 USA  
+1.248.543.8085 | sales@lumerica.com

[www.LUMERICA.com](http://www.LUMERICA.com)



Form No. LMDLAALHB\_1c-12/22 (DRPC)